



Properties

- Suited for automated vibration measurement, for instance in quality control
- Movable tip guided by air damped piston / cylinder system
- Linear frequency range by frictionless movement of the sensing element
- Constant tip pressure by spring suspension guarantees reproducible measuring results
- Low distortion
- Low sensitivity for environmental vibration
- Long life expectancy: over 10 million test cycles
- IP62 protection grade, oil resistant
- Probe tip electrically isolated from body

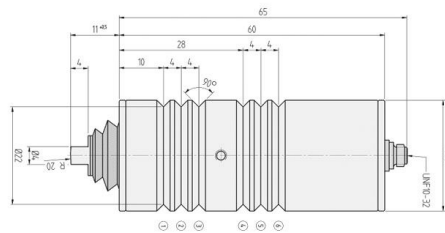

Piezo design	Shear design	
Output	IEPE	
Voltage sensitivity	100	mV/g
Sensitivity tolerance	5	%
Measurement range, pos./neg.	20	g
Transverse sensitivity	<5	%
Lower frequency limit (3 dB)	40	Hz
Upper frequency limit (3 dB)	3200	Hz
Upper frequency limit (10 %)	1900	Hz
Upper frequency limit (5 %)	1400	Hz
Resonant frequency	>6	kHz
Resonance amplitude	20	dB
Constant current supply	2 - 20	mA
Bias voltage at 4 mA	12 - 14	V
Output impedance	<150	Ω
Residual noise; wide band; RMS	<400 (0,5 - 20000 Hz)	μg
Noise density 10 Hz	15	μg/√Hz
Noise density 100 Hz	4	μg/√Hz
Operating temperature range	0 - 80	°C
Temperature coefficient of voltage sensitivity	-0,1	%/K
Max. stroke	5,5	mm
Recommended deflection	2 - 4	mm
Max. vibration displacement	1	mm
Spring stiffness	0,32	N/mm
Dynamic mass	9	g
Weight without cable	120	g
Case material	Stainless steel	
Connector direction	axial	
Connector	UNF10-32	
Mounting	Clamp collar Ø 25; M5x8 screw DIN 914 in 90° notch	
IP code	IP62	

Typical Frequency Response

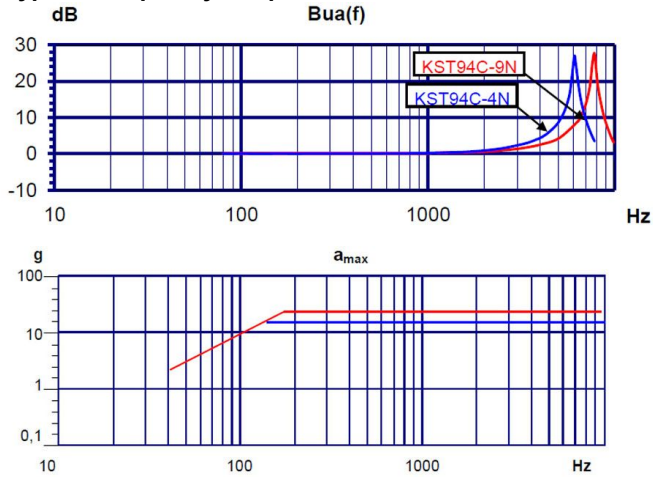

Connection Accessories

- 009-UNF-UNF-1,5: Low-noise cable; 1,5 m; UNF 10-32 to UNF 10-32; 120 °C; D2,1
- 009-UNF-BNC-1,5: Low-noise cable; 1,5 m; UNF 10-32 to BNC; 120 °C; D2,1
- 010-UNF-BNC-5: Low-noise cable; 5 m; UNF 10-32 to BNC; 120 °C; D2,1
- 010-UNF-BNC-10: Low-noise cable; 10 m; UNF 10-32 to BNC; 120 °C; D2,1
- 017: Plug adapter UNF10-32 (female) to BNC (male)

Notice: We offer the optional adapter KST94CA for the vibration calibrator VC120. It is suited for calibrations between 100 and 10000 Hz with defined coupling conditions and adjustable probe position.



Manfred Weber

Metra Mess- und Frequenztechnik in Radebeul e.K.

Meissner Str. 58

01445 Radebeul

Tel. +49 (0)351 836 2191

Internet: www.MMF.de

Email: Info@MMF.de

Fax: +49 (0)351 836 2940

08.23

